

PROJECT:

FOR APPROVAL




CERTIFIED

DUROVAC MODEL PL250p PORTABLE VACUUM SYSTEM

STANDARD FEATURES:

1. 500 ICFM @ 16" Hg. CONTINUOUS
2. SUTORBILT 6M VACUUM PRODUCER
3. 25 HP LEESON MOTOR
4. FOUR (4) CARTRIDGES WITH TOTAL 244 SF FILTER AREA
5. 99.9% AT 1.0 MICRON, STANDARD
6. AUTOMATIC PULSE CLEANING "ON DEMAND"
7. 45.4 SF INLINE FILTER, STANDARD
8. 40 CF MATERIAL STORAGE
9. SILO TYPE, ABRASION RESISTANT INLET
10. CUSTOM TUNED SILENCER, UNDER 85 DBA @ 3FT!

FOUR (4) CARTRIDGE FILTERS
244 SQ FT SURFACE AREA

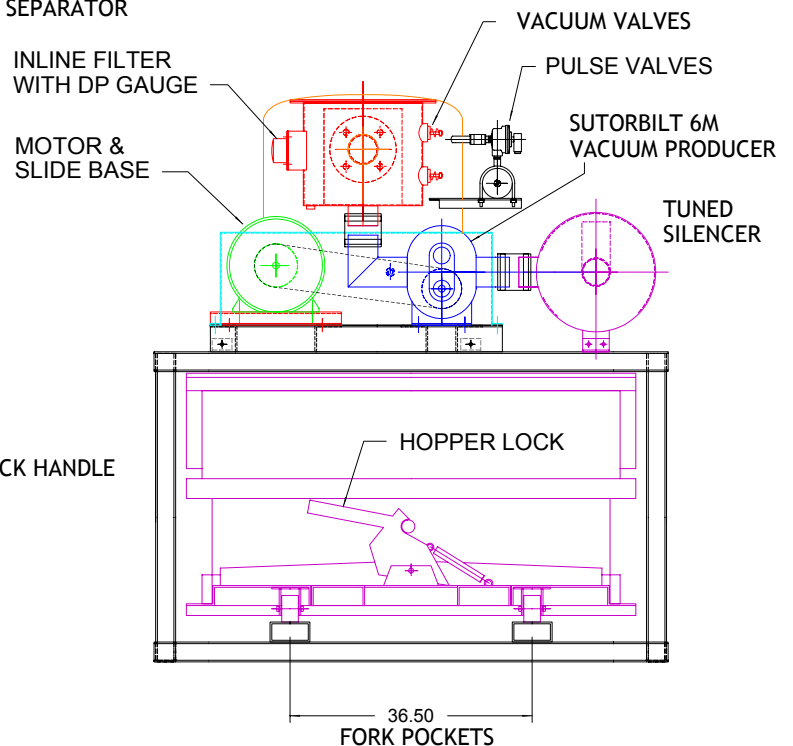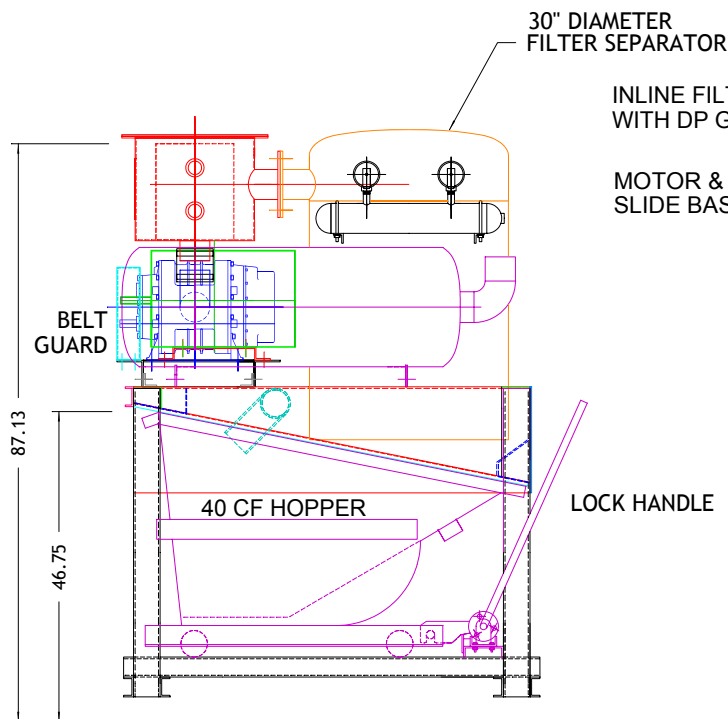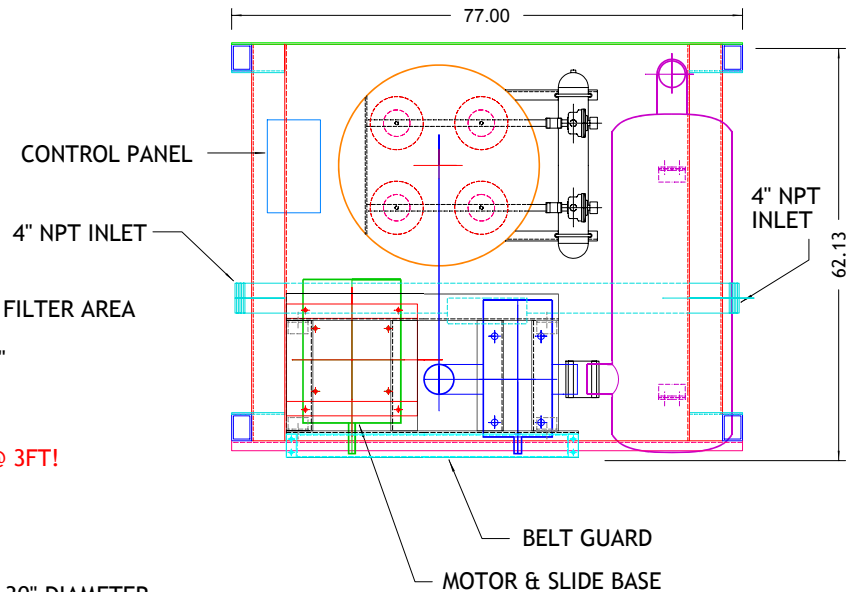

NOTES:

1. SUITABLE FOR WET AND DRY PICKUP
2. EXPECT 150 - 200 LBS/MIN PICKUP WITH 3" HOSE 25 FT LONG
3. WILL SUPPORT A FIXED PIPE NETWORK UP TO 400 FT LONG WITHOUT MODIFICATION
4. PAINTED PRIME BASE COAT AND TWO TOP COATS OF ENAMEL

**WARNING: VACUUM PRODUCERS THAT CLAIM TO ACHIEVE 18" Hg. CAN *NOT* MAINTAIN VACUUM AT THAT LEVEL WITHOUT OVERHEATING!
ENSURE YOU ASK FOR A WRITTEN PERFORMANCE GUARANTY THAT SPECIFIES 1 HOUR SEALED RUN TIME**

NORTHWIND AIR SYSTEMS
BRAMPTON, ON 888-330-3365

01		
00	10 DEC 02	FOR REVIEW
Rev.	Date	

DATE:	
DRAWN BY:	KRW
SCALE:	NTS

DRAWING No.	Rev.
ND2002160	00
PAGE	1 OF 1