


PROJECT:

FOR APPROVAL

CERTIFIED

SIX (6) CARTRIDGE FILTERS
179.4 SQ FT SURFACE AREA

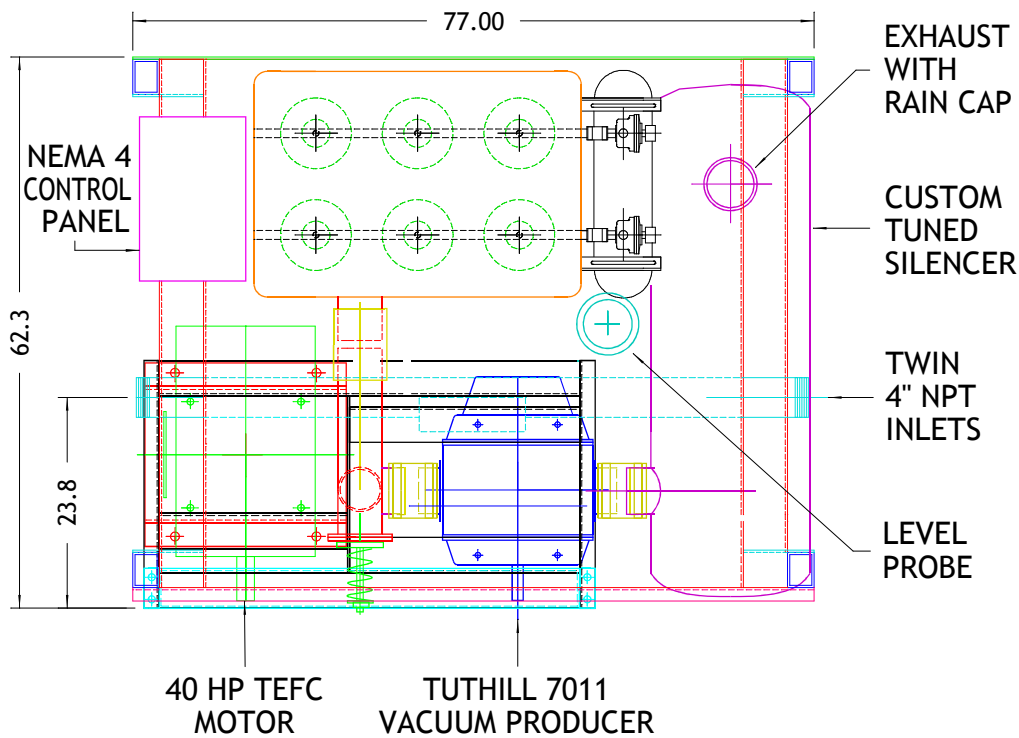

DUROVAC MODEL PL400 PORTABLE VACUUM SYSTEM



STANDARD FEATURES:

1. 950 ICFM @ 15" Hg. CONTINUOUS
2. TUTHILL 7011 VACUUM PRODUCER
3. 40 HP LEESON MOTOR, VOLTAGE TO SUIT
4. 179.4 SF CARTRIDGE FILTERS, POLYESTER PTFE
5. 99.9% @ 0.4 MICRONS, STANDARD
6. AUTOMATIC PULSE JET CLEANING
7. OPTIONAL INLINE SAFETY FILTER
8. 1.5 CY (40 CF) USABLE MATERIAL STORAGE
9. ABRASION RESISTANT INLET PRE-SEPARATOR
10. CUSTOM TUNED SILENCER, 88 DBA @ 3 FT!

AVAILABLE OPTIONS:

1. OVERBAGS FOR OPERATION WITH FIBROUS DUST
2. UPGRADE TO NEMA 4X AND LOW TEMP PANEL
3. OUTBOARD 3 HP AIR COMPRESSOR

WEIGHT 4880 LBS EMPTY

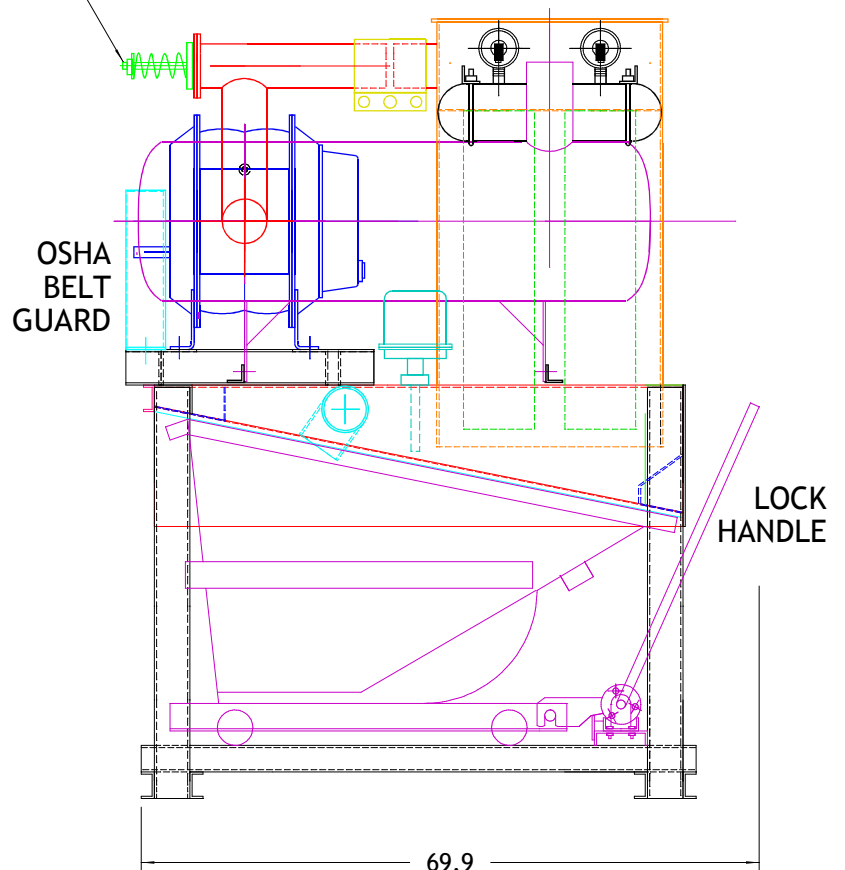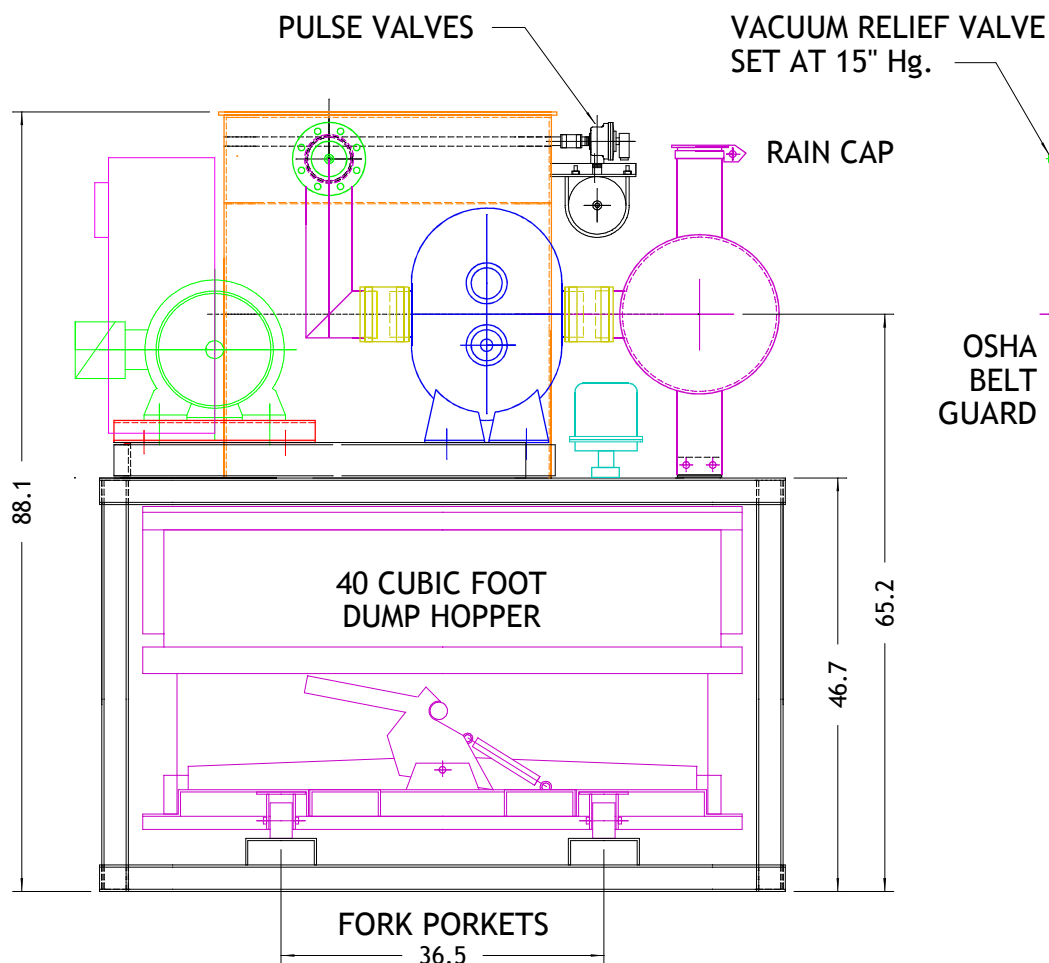

NOTES:

1. SUITABLE FOR WET AND DRY PICKUP
2. EXPECT 250 LBS/MIN PICKUP WITH 4" HOSE 25 FT LONG
3. WILL SUPPORT A FIXED PIPE NETWORK UP TO 300 FT LONG WITHOUT MODIFICATION
4. PAINTED PRIME BASE COAT AND TWO TOP COATS OF ENAMEL

**WARNING: VACUUM PRODUCERS THAT CLAIM TO ACHIEVE 18" Hg. CAN *NOT* MAINTAIN VACUUM AT THAT LEVEL WITHOUT OVERHEATING!
ENSURE YOU ASK FOR A WRITTEN PERFORMANCE GUARANTEE THAT SPECIFIES 1 HOUR SEALED RUN TIME**

NORTHWIND AIR SYSTEMS
BRAMPTON, ON 888-330-3365

01			
00	10 DEC 02	FOR REVIEW	
Rev.	Date		

DATE:
DRAWN BY: KRW
SCALE: NTS

DRAWING No. Rev.
060411 - D01 00
PAGE 1 OF 1